

Keep upright at all times. Shake/stir well before and during application.

- Barrettine Decking Oil has been specially formulated to offer Oil, Protection and Staining all in one application.
- It resists flaking and peeling and being water repellent helps prevent timber splitting and cracking.
- It can also be used on other wooden garden structures and is harmless to plants and pets when dry.
- Shake/stir well before and during application.
- Product gives a transparent / translucent finish colour effect to wood, the grain texture is still visible.

WHERE TO USE

For use on all pre-treated, pressure treated and preservative impregnated timber, offers superb protection to Decking Boards, Deck Tiles and Balastrading. Also as a superior finish to sheds, Huts and Fencing.

Note: Cannot be used over timber that has been previously painted with conventional paints, varnishes, lacquers etc without first removing such barrier coatings. If used on Wooden Garden furniture, make sure the coating has fully dried/cured and is colour fast before use. The results and timing can vary due to atmospheric weather conditions and wood type. Natural oily/resinous woods and tight grain hardwoods can take longer to dry and completely cure. To be sure there is no risk of colour transfer from the treated wood/ furniture onto clothing, we recommend running a white lint-free cloth over the surface and inspect for any colour rub off. If colour transfer occurs, the treated article may need a longer drying time. Due to the nature of certain resinous woods, a sealer/topcoat may be required. We recommend carrying out a test area first.

COVERAGE

One coat - up to 8 sq metres per litre on smooth timber or up to 6 sq meters per litre on rough sawn timber.

PREPARATION

Decking has usually been pre-treated with a preservative. If using new, unpreserved timber treat with Barrettine Universal Preservative (ideally two coats). Leave to dry for 24 - 48 hours prior to using Decking Oil. Ensure all surfaces are clean, dry and free from dust, dirt and algae. Treat with Barrettine Knockout® Mould & Mildew Cleaner if necessary. New wood should be first wiped down with White Spirit to remove surface resins etc. Highly resinous timbers and some hardwoods may effect performance and final results. Test in an inconspicuous area before use.

APPLICATION - SHAKE WELL

Decant into paint kettle and apply an even coat to all surfaces to ensure optimum performance. For best results, apply to all sides of decking before construction, brushing in the direction of wood grain. Normally one coat applied liberally with a wide bristle brush is sufficient, however should you require a deeper colour a second coat may be

applied after 12-24 hours. Product gives a transparent/translucent finish colour effect to wood, the grain texture is still visible, especially on light colours leaving a matt or sheen finish depending upon number of coats. If desired Barrettine Decking Oil may be applied by synthetic roller or sprayer. However always back brush to ensure even coverage. Leave for 24 - 48 hours or until dry before subjecting to heavy foot traffic. Recoat as and when desired. Do not apply if the ambient temperature is below 5 Celsius, in damp conditions or rain is likely within 24 hours of application.

CLEANING

Remove as much of the product from brushes etc before cleaning with Barrettine White Spirit. Clean any spills before it is allowed to dry.

Note: Immediately after use saturate all soiled cloths with water and dispose of safely outside the home.

HEALTH, SAFETY & ENVIRONMENTAL INFORMATION

Contains: Hydrocarbons, C9-C11, n-alkanes, isoalkanes, cyclics, < 2% aromatics; Naphtha (petroleum), hydrotreated heavy < 0.1% Benzene. Flammable liquid and vapour. May be fatal if swallowed and enters airways. May cause drowsiness or dizziness. Harmful to aquatic life with long lasting effects. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Avoid breathing fume, mist, spray, vapours. Use only outdoors or in a well-ventilated area. Wear protective gloves, protective clothing, eye protection. IF SWALLOWED: Immediately call a POISON CENTER or doctor. Do NOT induce vomiting. Store locked up. Dispose of contents/container to hazardous or special waste collection point, in accordance with local, regional, national and/or international regulation. Repeated exposure may cause skin dryness or cracking. Contains 3-iodo-2-propynyl butylcarbamate; 3-iodoprop-2-yn-1-yl butylcarbamate(55406-53-6). May produce an allergic reaction.

UN N° 1268



VERY HIGH: VOC content more than 50% VOC's (Volatile Organic Compounds) contribute to atmospheric pollution. EU limit value for this product (cat/A/f): 700 g/l (2007) 700 g/l (2010). This product contains max 568 g/l VOC

Barrettine Products
St. Ivel Way, Warmley, Bristol. BS30 8TY. UK
T: +44 (0) 117 9600060 E: sales@barrettine.co.uk
www.barrettinePro.co.uk

Barrettine (Europe) Ltd
Unit 3D North Point House, North Point Business Park,
New Mallow Road, Cork. T23 AT2P. Ireland
T: +353 21 206 6530


Barrettine
TRUSTED BY THE PROFESSIONALS

PREMIER

DECKING OIL
ALL IN ONE
DECKING TREATMENT



Regular treatment gives
Superb water repellency

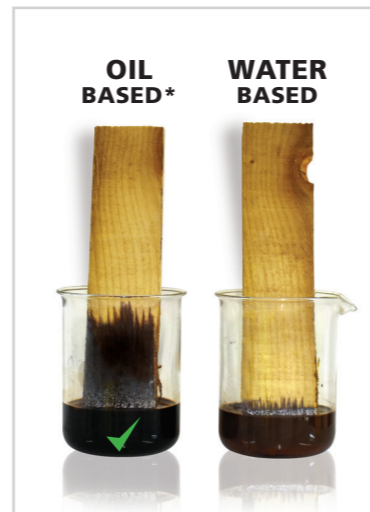

- ✓ OIL/SPIRIT BASED
- ✓ DEEPER PENETRATION
- ✓ GREATER PROTECTION

UFI: 3G20-JOP5-G00X-KKM1

SHAKE WELL BEFORE & DURING USE
(FOR AT LEAST ONE MINUTE)

5 Litre e

Barrettine
TRUSTED BY THE PROFESSIONALS



PREMIER



DECKING OIL
ALL IN ONE
DECKING TREATMENT

✓ Oils ✓ Protects ✓ Stains

Contains Added **UV Stabilisers**

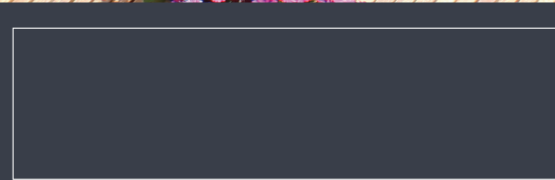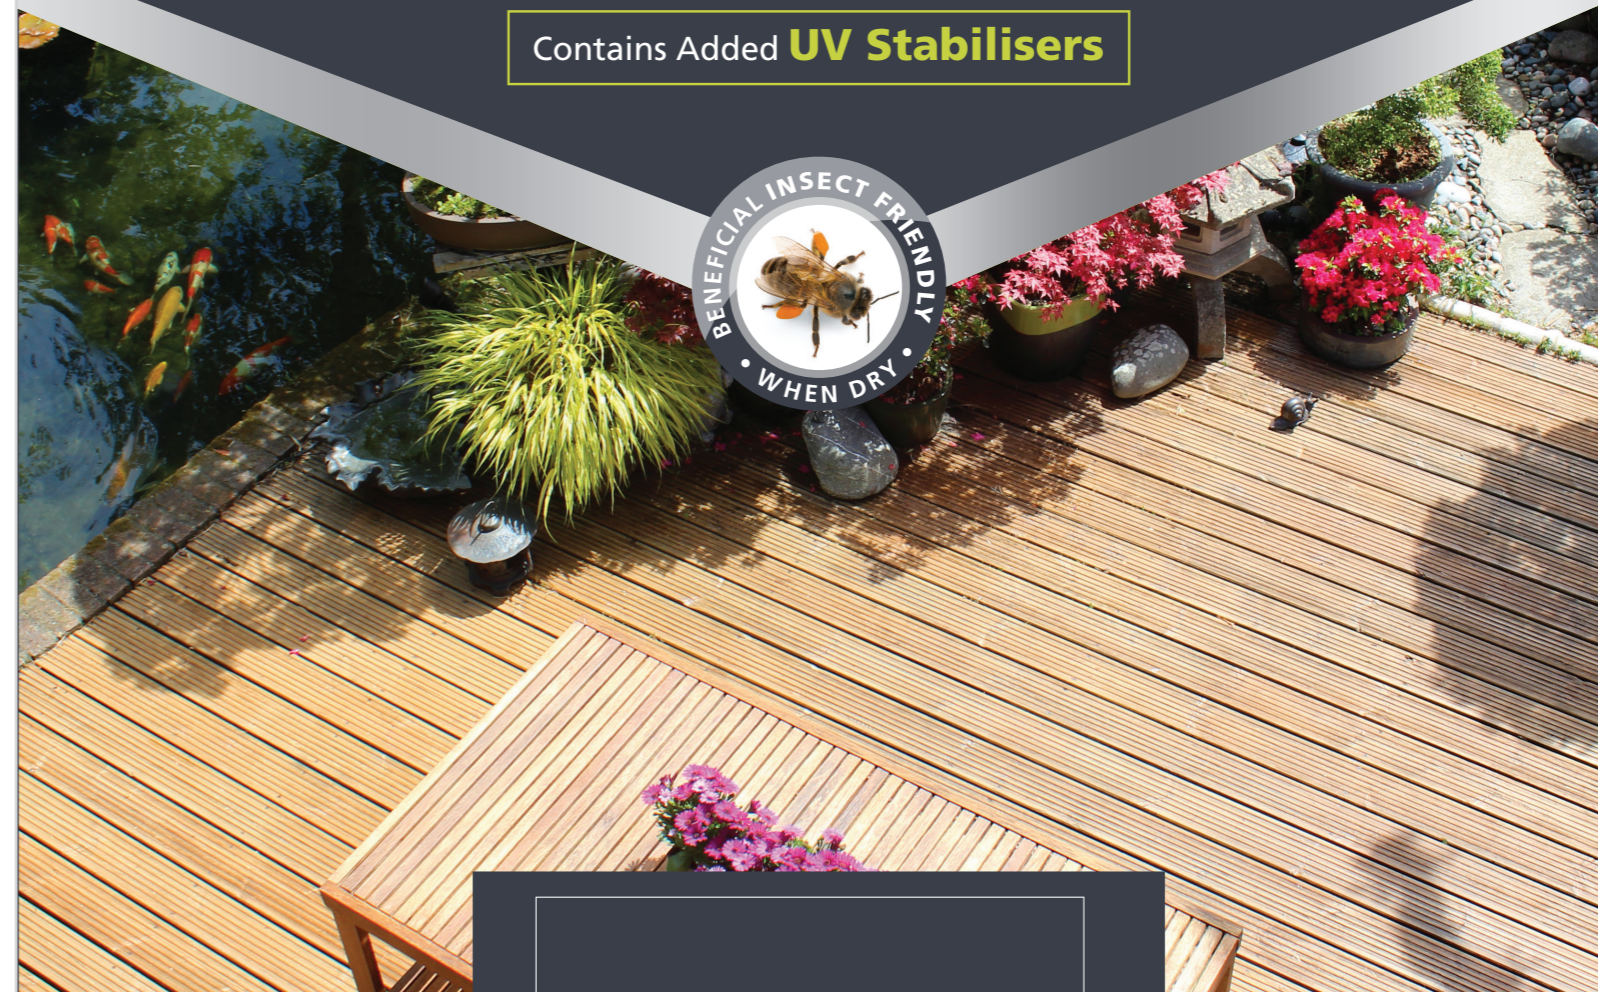

CONTAINS FILM BIOCIDE. IF USED ON UNPRESERVED TIMBER, USE BARRETTINE UNIVERSAL PRESERVER AS A PRIMER PRIOR TO APPLYING DECKING OIL TREATMENT.



5L e

RELEASE POURING SPOUT TO POUR PRODUCT.

For full instructions,

SCAN ME



The following colours are also available in our Decking Oil Range.

- Natural Oak
- Amber Light Oak
- Dark Oak
- Cedar Red
- Rosewood
- Clear

The colour swatches are an indication only and representative of the product applied to clean new/pale timber. The final colour finish can vary considerably due to the age, type & condition of the timber being treated. We always recommend carrying out a test area first in an inconspicuous area to make sure you are happy with the final dried colour/finish.

SHAKE WELL BEFORE & DURING USE
(FOR AT LEAST ONE MINUTE)

5 Litre e