

PRODUCT DESCRIPTION & AREAS OF USE

Barrettine Log Cabin & Decking Treatment has been specially formulated to offer oil and protection to log cabins etc that have been previously treated with a wood preserver or pressure treated. If the log cabin / decking timbers have not been preserved we recommend cleaning / washing down with a biocidal wash such as Knockout Mould & Mildew. Then apply at least 2 coats of Barrettine Universal Preserver before applying Log Cabin / Decking treatment. Resists flaking/peeling and being water repellent helps prevent timber splitting and cracking. It can be used on other wooden garden structures and is harmless to plants and pets when dry. Shake/stir well before and during applications.

WHERE TO USE

Recommended for external surfaces only.

For use on all pre-treated, pressure treated and preservative impregnated timber, offers superb protection to log cabins and decking boards, deck tiles and balustrading. Also a superior finish to sheds, huts and fencing. **Note:** This product is not recommended for use over sealed timber i.e. timber that has been previously coated with paints, varnishes or conventional wood stains. The colour swatch is an indication only and representative of the product applied to clean new/pale timber. The final colour finish can vary considerably due to the age, type & condition of the timber being treated. We always recommend carrying out a test area first in an inconspicuous area to make sure you are happy with the final dried colour/finish.

COVERAGE

One coat - Up to 8 sq metres per litre on smooth timber or 5 sq metres per litre on rough/weathered sawn timber.

PREPARATION / APPLICATION (SHAKE WELL)

Ensure wood to be treated is dry, free from dirt and repellent coatings such as paint or varnish (remove and sand down as required). Highly resinous timbers and some hardwoods may affect performance and final results - Test before use. Do not apply if the ambient temperature is below 5 Celsius, in damp conditions or rain is likely within 24 hours of application.

Decant into paint kettle and apply an even coat to all external surfaces to ensure optimum performance. For best results, apply to all external sides of log cabins and decking before construction, brushing in the direction of the wood grain. Normally one coat applied liberally with a wide bristle brush is sufficient, however should you require a further second coat it may be applied after 12-24 hours. If desired Barrettine Log Cabin & Decking Treatment may be applied by synthetic roller or sprayer, however always back brush to ensure even coverage. For decking boards leave for 24-48 hours or until dry before subjecting to heavy footfall traffic. Recoat as and when desired.

CLEANING

Remove as much of the product as possible from brushes etc. before cleaning with Barrettine White Spirit. Clean any spills before they are allowed to dry. **Note:** Immediately after use saturate all soiled cloths with water and dispose of safely outside the home.

LOG CABIN & COMPLETE DECKING TREATMENT

SHAKE WELL
BEFORE & DURING USE FOR AT LEAST 1 MINUTE

HEALTH, SAFETY & ENVIRONMENTAL INFORMATION

Contains: Hydrocarbons, C9-C11, n-alkanes, isoalkanes, cyclics, < 2% aromatics.
Flammable liquid and vapour. May be fatal if swallowed and enters airways. May cause drowsiness or dizziness. Harmful to aquatic life with long lasting effects.
If medical advice is needed, have product container or label at hand. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames, and other ignition sources. No smoking. Avoid breathing fume, vapours, mist, spray. Use only outdoors or in a well-ventilated area. IF SWALLOWED: Immediately call a POISON CENTER, a doctor. Do NOT induce vomiting. Store locked up. Dispose of contents and container to hazardous or special waste collection point, in accordance with local, regional, national and/or international regulation. Repeated exposure may cause skin dryness or cracking. Contains 3-iodo-2-propynyl butylcarbamate; 3-iodoprop-2-yn-1-yl butylcarbamate(55406-53-6). May produce an allergic reaction.



Danger

UN N° 1268

VERY HIGH: VOC content more than 50% VOC's (Volatile Organic Compounds) contribute to atmospheric pollution.
EU limit value for this product (cat/A/f): 700 g/l (2007) 700 g/l (2010).
This product contains max 568 g/l VOC

UFI: NE30-408H-VOOD-VCOR



OTHER WOOD TREATMENTS IN THE BARRETTINE RANGE

Premier Nourish & Protect Coloured Preservative - (PNPC) is a low odour solvent-borne ready to use product. It actively protects against wood destroying and wood discolouring fungi as well as against wood boring insects. PNPC Preserver has good penetrating power transporting the actives deep into the wood. Coloured versions contain UV fade resistant pigments that provide some protection to the wood from damaging sunlight.

Clear Universal Wood Preservative - (CUWP) is a solvent-borne ready to use product. It contains active ingredients effective against wood destroying and wood discolouring fungi as well as against wood boring insects. CUWP penetrates wood easily and thereby gets deep into inner layers. It is moisture regulating and provides an adhesive surface suitable for glues, fillers, and solvent or water based finishing treatments such as paints, varnishes, stains etc.

Decking Oil All-in-One Treatment - Specifically formulated for use on pressure treated and preservative impregnated timber offering superb protection to deck boards, deck tiles and balustrades etc. Also achieves a superior finish to summerhouses and other outdoor timber structures and materials. Non-flaking and its water repellent properties help protect the timber from splitting & cracking.

Premier Wood Protective Treatment - is a wood sealer for rough, sawn or smooth timber. It contains water repellent resins and together this helps reduce decay, swelling, twisting of wood. Pigments have good UV fade resistance and will help protect wood from UV damage.

Barrettine Products
St. Ivel Way, Warmley, Bristol. BS30 8TY. UK
T: +44 (0) 117 9600060 E: sales@barrettine.co.uk
www.barrettinePro.co.uk

Barrettine (Europe) Ltd
Unit 3D North Point House, North Point Business Park,
New Mallow Road, Cork. T23 AT2P. Ireland
T: +353 21 206 6530

RELEASE
POURING SPOUT
TO POUR PRODUCT.

For full instructions,

SCAN ME



Regular treatment gives
Superb water repellency



- ✓ OIL/SPIRIT BASED
- ✓ DEEPER PENETRATION
- ✓ GREATER PROTECTION

SHAKE WELL
BEFORE & DURING USE
(FOR AT LEAST ONE MINUTE)


5 Litre e



CLEAR PREMIER

LOG CABIN & COMPLETE DECKING TREATMENT

- ✓ DEEP PENETRATING OIL/SPIRIT LOW ODOUR FORMULA
- ✓ HARMLESS TO BENEFICIAL INSECTS & PLANTS WHEN DRY
- ✓ OILS AND PROTECTS LOG CABINS & DECKING

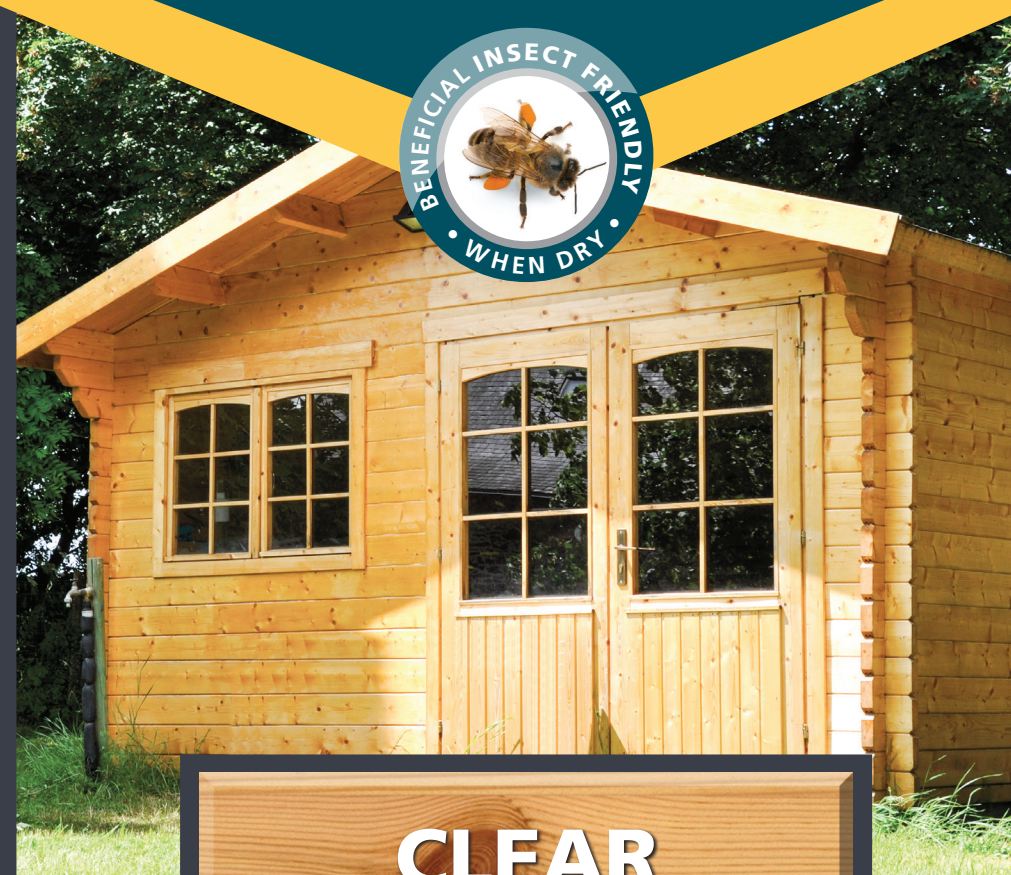

CLEAR

CONTAINS FILM BIOCIDES. IF USED ON UNPRESERVED TIMBER, USE BARRETTINE UNIVERSAL PRESERVER AS A PRIMER PRIOR TO APPLYING LOG CABIN TREATMENT.

5L e

CLEAR PREMIER

LOG CABIN & COMPLETE DECKING TREATMENT



The following colours are also available
in our Decking Oil Range.

Natural Oak

Amber Light Oak

Dark Oak

Cedar Red

Rosewood

Clear

The colour swatches are an indication only and representative of the product applied to clean new/pale timber. The final colour finish can vary considerably due to the age, type & condition of the timber being treated. We always recommend carrying out a test area first in an inconspicuous area to make sure you are happy with the final dried colour/finish.

SHAKE WELL
BEFORE & DURING USE
(FOR AT LEAST ONE MINUTE)

5 Litre e