

Barrettine

TRUSTED BY THE PROFESSIONALS

SPECIALISED
COATINGS & FINISHES

Quick Drying Floor Varnish

A Quality Interior Floor Varnish

A durable, clear finish for
wooden floors & work surfaces.

CLEAR SATIN

2.5 Le



Quick Drying Floor Varnish is an easy to use, superior quality single pack finish, formulated to very high standards of resistance and surface abrasion on most interior wood surfaces. Applied by brush or pad, Quick Drying Clear Floor Varnish is exceptionally easy to apply, exhibiting excellent flow and high build properties. Quick Drying Clear Floor Varnish also offers a high degree of protection and is ideal for application on to floors and working surfaces where durability and quality of finish are the primary requirements.

PREPARATION

Before use, test a small inconspicuous area with all products to be used, to ensure a satisfactory final finish & compatibility.

Wear appropriate personal protective equipment (PPE) such as chemical resistant gloves, overalls and eye/face protection to protect against splashes. If in doubt speak, to your PPE supplier and show them this label/product, or call us for further advice.

Product has a light amber hue so is not recommended over painted surfaces.

Ensure all surfaces are clean, dry and free from any previous finish. Sand the substrate with a fine 120/150 grade sanding paper or 120/150 grit sanding disk, collecting the sawdust to mix with a floor filler gel to fill any cracks / knots. Finally remove all traces of dust and any other contaminants before application of product.

APPLICATION

Ensure all areas to be coated are extremely well ventilated during and after application. Apply at room temperature. Quick Drying Clear Floor Varnish is formulated for application directly, thin 10% with White Spirit if required for woods with high oil content. Maximum of 2 coats on hardwood, 3 coats on softwood or more porous timber.

FIRST COAT & SECOND COAT

Stir contents thoroughly before and during use and apply in a warm (15-25°C), well ventilated room. Apply THINLY using an oil brush or a good quality bristle or synthetic brush and lay EVENLY, following the direction of the grain. Over-application will prevent thorough drying and levelling.

Allow 4-6 hours drying in warm, dry, well ventilated conditions between coats.

Low temperature/high humidity adversely affects drying time.

Hard dry in 12-24 hours with full hardness taking up to 5 days.

CLEANING & MAINTENANCE

For regular light cleaning, wipe with a damp cloth and leave to dry. Periodically, a sparing application of water-based floor cleaner is recommended, followed by a Floor Wax or Beeswax Wax for furniture.

COVERAGE

14sqm per litre, depending on substrate and method of application.


THINNERS

White Spirit.

RECOMMENDED FOR USE ON

Fine Furniture, Doors, Floors, Cabinet Work and Panelling.

Health, Safety & Environmental Information

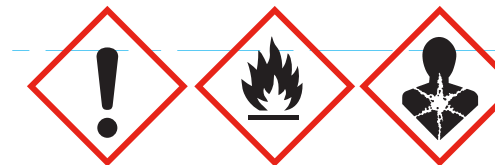

Danger

Contains: Cobalt Zirconium Carboxylate; Amorphous silica; Hydrocarbons, C9-C11, n-alkanes, isoalkanes, cyclics, < 2% aromatics.

Flammable liquid and vapour. May be fatal if swallowed and enters airways. May cause allergy or asthma symptoms or breathing difficulties if inhaled. May cause drowsiness or dizziness. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Avoid breathing vapours, spray. Use only outdoors or in a well-ventilated area.

IF SWALLOWED: Immediately call a POISON CENTER, a doctor. Do NOT induce vomiting. Dispose of contents, container to hazardous or special waste collection point, in accordance with local, regional, national and/or international regulation.

EU limit value for this product (Cat. A/i): 500g/l (2010).

This product contains max 500g/l VOC.

Barrettine
TRUSTED BY THE PROFESSIONALS

UFI: 4780-FOWS-1003-WFNC

2.5 Le



Barrettine Products
St. Ivel Way, Warmley, Bristol. BS30 8TY. UK
T: +44 (0) 117 9600060
E: sales@barrettine.co.uk
www.barrettinePro.co.uk

Barrettine (Europe) Ltd
Unit 3D North Point House, North Point
Business Park, New Mallow Road, Cork.
T23 AT2P. Ireland
T: +44 (0) 117 9600060

ZONA RASTREMATA / TAPERING AREA